

www.varianta.info

Technical Data

LOA: 13.33 m | 44'

Hull length: 13.18 m | 43'5"

LWL: 12.00 m | 39'4"

Beam 4.16 m | 13'2"

Draft: 2.23 m | 7′3″ (standard) 1.79 m | 5′8″ (option)

Displacement: approx. 9.8 t

Ballast: approx. 3,200 kg

Engine: Volvo D2-40, 29.4 kW / 40 HP

Fresh water: approx. 280 l

Fuel tank: approx. 120 l

CE Certificate: A (ocean)

Total sail area: approx. 105.00 m²

Main sail: approx. 57.00 m²


Genoa 105%: approx. 48.00 m²


Gennaker: approx. 140.00 m² (opt.)

Rig: I 17.50 m J 5.20 m P 16.55 m E 5.90 m

Design: judel / vrolijk & co

Modellyear 2014 - valid from Januar 2014

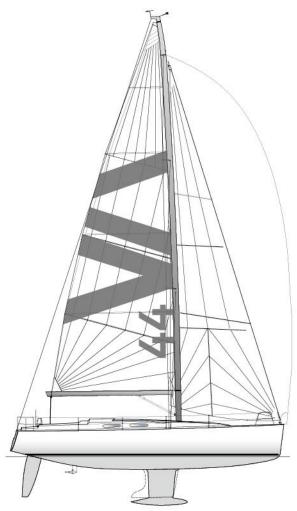



www.varianta.info

VA | Hull

- White Hull Black waterline
- Isophtalic Gelcoat
- Vinylester 1st layer
- Solid laminate Polyester
- Bulkheads laminated to hull and deck
- GRP strongbacks

W ∣ Deck

- White deck
- Isophtalic Gelcoat
- Vinylester 1st layer
- Bulk laminate Polyester
- Balsa sandwich
- Non-slip deck surface

W\ | Steering System

- Leather covered steering wheel size 1800 mm
- Semi-balanced, profiled rudder with alloy shaft and self-aligning needle bearings
- Emergency tiller

W ∣ Keel

- Standard: T shape keel draft: 2.23 m / 7'3"
- Option: Shallow draft 1.79 m / 5'9"
- Stainless steel keel bolts

√ | Deck Equipment

- Self-draining cockpit with large lockable storage
- 2 opening hatches
- 1 opening portholes
- 3 mooring cleats
- 2 self-tailing winches Lewmar EVO 45 on coachroof
- 2 self-tailing winches Lewmar EVO 45 near Helms position
 - Halyards lead to cockpit
 - 10 halyard & sheet stoppers

- German Main sheeting system
- Main sheet traveller in cockpit
- Split pulpit
- Pushpit with ensign staff socket
- Sliding hatch garage
- Sliding hatch
- Drop board
- Double stainless steel safety rail
- Handrails
- Swimming ladder
- Winch handle

√ | Water System

Tank

- Fresh water capacity approx. 280 I
- Water infill on deck

Pumps

- Electrical pressurised water system

Faucets

- Faucets in galley and head

Bilge pumps

- 1 manual bilge pump
- 1 electric bilge pump

Toilet / Head

- Holding tank
- Marine toilet
- Sea and deck discharge

W ∣ Engine

- Volvo D2 40 / 29, 4 kW / 40 HP, diesel engine
- Sail drive
- Fresh water cooling
- 2-blade fix propeller
- Fuel tank, approx.120 l
- Fuel infill on deck
- Seawater strainer
- Fuel filter / Water separator
- Revolution counter
- Engine hour meter

W ∣ Electrics

- 12 V electrical circuits

Batteries

- Main battery switch
- 1 Engine battery: 12 V / approx. 90 Ah AGM
- 1 Service battery: 12 V / approx. 165 Ah AGM

Electric control panel 12 V

- Onboard electrics
- Voltmeter

Interior lighting

- in fwd. cabin
- in aft cabin
- in saloon
- in galley
- in head
- in storage room Navigation lights

- Steaming light LED Bow lights
- LED Stern light - LED Anchor light

Navigation instruments

- Illuminated compass

W ∣ Galley

- Stainless steel sink 2-burner LPG gas stove with oven, gimballed
- Gas system and self draining LPG bottle storage in cockpit
- Lockers and drawers
- 60 liter 12 V fridge Top loader

W Interior Accommodation

- High quality marine plywood in white, with dark wood style floorboards
- White bulkheads

- Walnut finish furniture parts Forward cabin (A1 layout)

- Separated from saloon by a door
- 2 large berths and double berth, queen size
- Shelves above berth

Aft cabin

- Separated from saloon by a door
- Large double berth
- Combined locker in Walnur finish

Saloon

- Companionway steps
- 3 seater sofa on starboard and on port side
- Foldable charttable
- Design Saloon table
- Black vilt storage places behind salon seats Head / Shower

- Large head
- Marine toilet
- Holding tank
- Sea and deck discharge
- Locker & shelves

W | Rigg and Sails

- 9/10-rig
- Two spreader anodised aluminium mast and boom
- Single line reefing system (cockpit handling)
- Rod kicker
- Stainless steel standing rigging
- Backstay adjuster
- Sheets and halyards lead aft to cockpit
- Main and jib sheets - Main sail with 2 full top battens & 2 normal
- battens - Jib with piston hanks and battens

Copyright by HanseYachts AG, Varianta VA44/B/0114. All measurements are approximate. Specification and material can be changed without notice,